


1 PIECE SYSTEM INSTALLATION




FRICION REDUCTION PILE SLEEVE


NOTE: For best results, install the units in lifts to coincide with the wall construction.
Piling should be free of debris that may interfere with the jacket installation and performance.

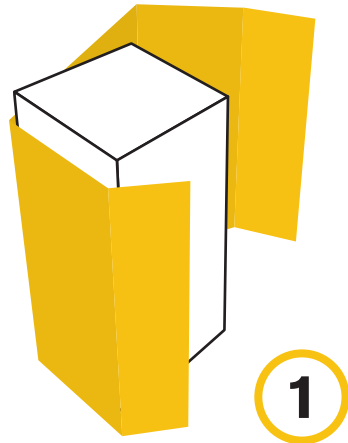


Center on pile.

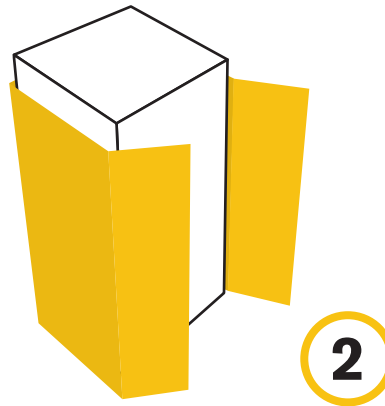


Square up edges of Jacket scored to accommodate each end of the pile corners (full length of jacket)

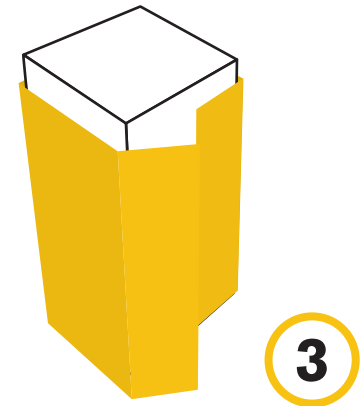

Continue to wrap jacket around balance of uncovered pile section, squaring up the scored edges at the pile corners.

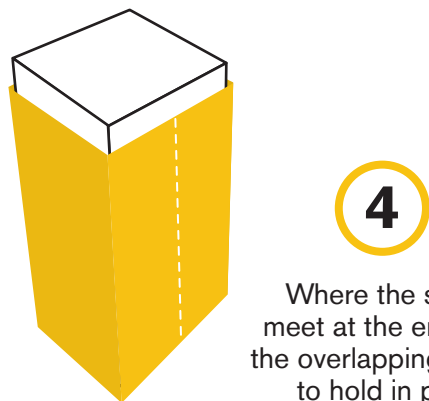

Where the sheets meet at the end, tape the overlapping section to hold in place.

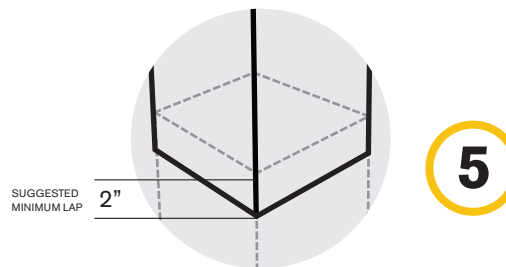

As each section is installed, lap as shown until the desired length of the pile is covered.

A product of
Foundation Technologies, Inc.

800-773-2368
1400 Progress Industrial Blvd.
Lawrenceville, GA 30049
foundationtechnologies.com